



TECHNICAL DATA SHEET

SPECIAL COLDLINE



AIM 11DR4

DRAWER TYPE COOLING & FREEZING UNIT

- Designed to operate in 43°C ambient %65 humidity
- New design for equal temperature distribution
- Zero ODP Injected 42 kg/m³ Polyurethane Insulation
- Digital controller with easy read screen
- Ergonomic door and handle designed for ease of opening and cleaning
- Icecool refrigeration system designed to be most technologically advanced and energy efficient
- Hot gas defrost system
- Waste heat recovery condensate vaporiser system
- All refrigerators can be produced in marine version
- Marine version includes 'Icecool marine' system, legs and shelves



SPECIAL COLDLINE AIM 11DR4





TECHNICAL DATA SHEET



GENERAL INFORMATION

Operating Temperature: +8/-20 °C
Climate class: 5
Overall dimensions: 940x700x850
Capacity GN 2/1-200: 1

CABINET CONSTRUCTION

Exterior Material: AISI 430 Stainless Steel
Back Material: Galvanized steel
Interior Material: AISI 430 Stainless Steel
Drain: ✓
LED lighting Eclairage LED: X
Insulation: Polyurethane with high density
40kg/m³, CFCs free, zero ODP and low GWP
Insulation thickness(mm): 50
Blowing Agent: HFO

REFRIGERATION

Thermostat: Touch screen- IP65
Refrigeration system: Split system
Defrost: Resistance
Expansion Device: Capillary
Fans: ✓
Condensation: Forced air
Evaporation: With fan
Condensate pan: Hot gas condensation pan

TECHNICAL FEATURES

Gas Refrigerant: R290
Power Supply: 230V / 1 / 50 Hz

CRATING

Crated dimensions L x l x H (mm): 990x750x910
Net Weight (kg): 178
Crated Weight (kg): 188



SPECIAL COLDLINE AIM 11DR4





TECHNICAL DATA SHEET

NEW CONDENSER SYSTEM

Stayclear condenser



CLASSIC



AIMCLEAR

SAVING ENERGY

Eco friendly, HFC – free polyurethane insulation providing low energy consumption





EVAPARATOR DOES NOT SNOW THROUGH HOT GAS DEFROST



CLASSIC



AIMEVA

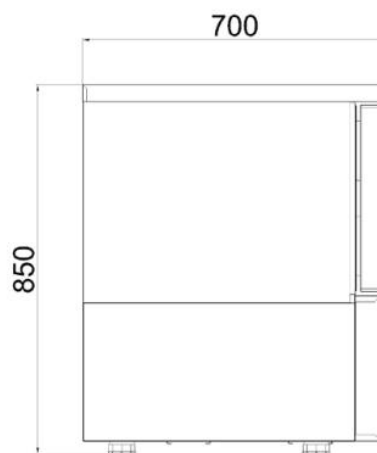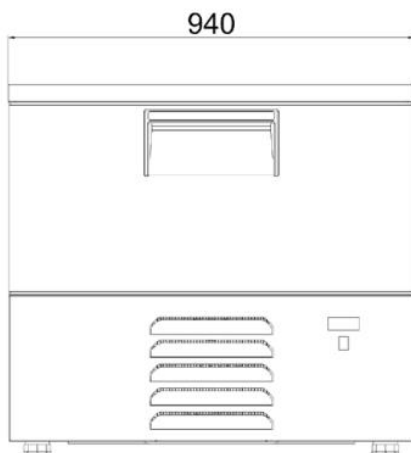

SPECIAL COLDLINE AIM 11DR4

