TECHNICAL DATA SHEET

BAR SERIES COOLING LINE

AIM 140R3
UNDERCOUNTER REFRIGERATORS

- Designed to operate in 43°C ambient %65 humidity
- New design for equal temperature distribution
- Zero ODP Injected 42 kg/m3 Polyurethane Insulation
- Digital controller with easy read screen
- Ergonomic door and handle designed for ease of opening and cleaning
- Icecool refrigeration system designed to be most tecnologically advanced and energy efficient
- Hot gas defrost system
- Waste heat recovery condensate vaporiser system
- All refrigerators can be produced in marine version

CE · ISO 9001:2015 · ISO 14001 · EAC · RoHS

Operating Tempatuare: -2/+8 ºC
Capacity: 140L
Overall dimensions: 600x640x820

CABINET CONSTRUCTION

Exterior Material: AISI 304 Stainless Steel
Back Material: Galvanized steel
Interior Material: AISI 304 Stainless Steel
Drain: ✓
LED lighting Eclairage LED: X
Insulation: Polyurethane with high density 40kg/m3, CFCs free, zero ODP and low GWP
Insulation thickness(mm): 50
Blowing Agent: HFO
Door: 1
Door Construction: Pressed hinged door. Easy to replace door gasket that does not require cleaning
Door Lock: Optional
Door Frame Heaters: X

FEATURES

Shelving: 1x2
Shelves dimensions LxD: 470x405
Legs, casters: Stainless steel legs, height adjustable (130-180mm)

REFRIGERATION

Thermostat: Touch screen- IP65
Refrigeration system: Split system
Defrost: Resistance
Expansion Device: Capillary
Fans: ✓
Condensation: Forced air
Evaporation: With fan
Condensate pan: Hot gas condensation pan

TECHNICAL FEATURES

Gas Refrigerant: R134A
Power Supply: 230V / 1 / 50 Hz

CRATING

Crated dimensions L x l x H (mm): 650x690x1070
Net Weight (kg): 62
Crated Weight (kg): 72

BAR SERIES COOLING LINE AIM 140R3

NEW CONDENSER SYSTEM
Stayclear condenser

CLASSIC

AIMCLEAR

SAVING ENERGY
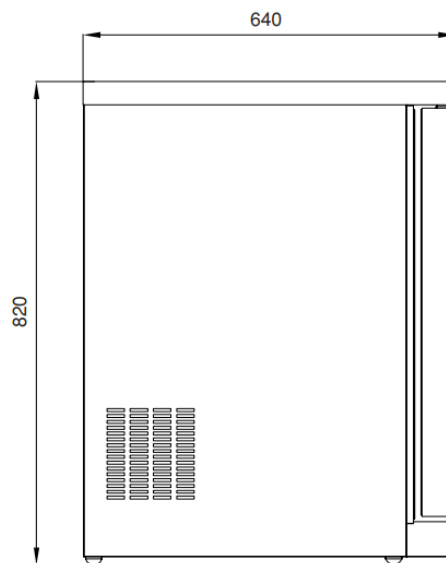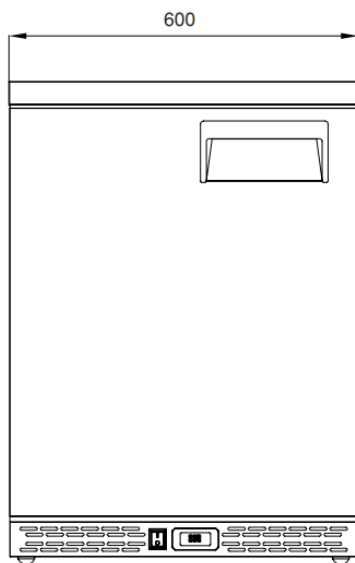Eco friendly, HFC – free polyurethane insulation providing low energy consumption

EVAPARATOR DOES NOT SNOW THROUGH HOT GAS DEFROST

CLASSIC

AIMEVA

600

640

820

BAR SERIES COOLING LNE AIM 140R3

CE | ISO 9001:2015 | ISO 14001 | EAC | RoHS