MIA(D)




TECHNICAL DATA SHEET

SPECIAL COLDLINE



AIM 256DP3-G COUNTER TYPE REFRIGERATOR - W/ FRONT GLASS

- Designed to operate in 43°C ambient %65 humidity
- New design for equal temperature distribution
- Zero ODP Injected 42 kg/m3 Polyurethane Insulation
- Digital controller with easy read screen
- Ergonomic door and handle designed for ease of opening and cleaning
- Icecool refrigeration system designed to be most tecnologically advanced and energy efficient yet
- Hot gas defrost system
- Waste heat recovery condensate vaporiser system
- All refrigerators can be produced in marine version

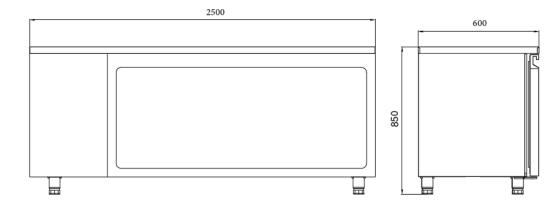

















TECHNICAL DATA SHEET

GENERAL INFORMATION

Operating Tempatuare: -2/+8 °C

Climate class: 5 Capacity: 560L

Overall dimensions: 2500x600x850

CABINET CONSTRUCTION

Exterior Material: AISI 304 Stainless Steel

Back Material: Galvanized steel

Interior Material: AISI 304 Stainless Steel

Drain: ✓

LED lighting eclairage LED: X

Insulation: Polyurethane with high density 40kg/m3, CFCs free, zero ODP and low GWP

Insulation thickness(mm): 50

Blowing Agent: HFO

REFRIGERATION

Thermostat: Touch screen-IP65 Refrigeration system: Split system

Defrost: Resistance

Expansion Device: Capillary

Fans: ✓

Condensation: Forced air **Evaporation:** With fan

Condensate pan: Hot gas condensation pan

TECHNICAL FEATURES

Gas Refrigerant: R134A

Power Supply: 230V / 1 / 50 Hz

CRATING

Crated dimensions L x I x H (mm): 2550x650x1100

Net Weight (kg): 196 Crated Weight (kg): 206



SAVING ENERGY

Eco friendly, HFC – free polyurethane insulation providing low energy consumption





AIMCLEAR





NEW CONDENSER SYSTEM

Stayclear condenser

EVAPARATOR DOES NOT SNOW THROUGH HOT GAS DEFROST















