



TECHNICAL DATA SHEET


SPECIAL COLDLINE



AIM 256DP4-G

COUNTER TYPE REFRIGERATOR – W/ FRONT GLASS

- Designed to operate in 43°C ambient %65 humidity
- New design for equal temperature distribution
- Zero ODP Injected 42 kg/m³ Polyurethane Insulation
- Digital controller with easy read screen
- Ergonomic door and handle designed for ease of opening and cleaning
- Icecool refrigeration system designed to be most technologically advanced and energy efficient yet
- Hot gas defrost system
- Waste heat recovery condensate vaporiser system
- All refrigerators can be produced in marine version

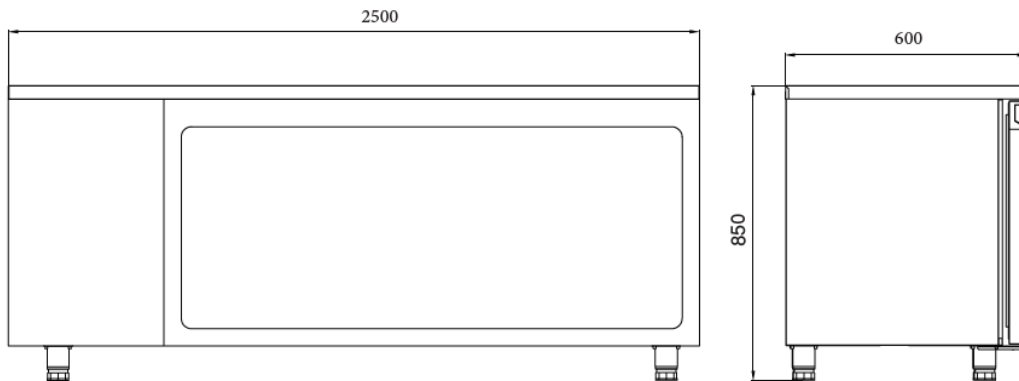

SPECIAL COLDLINE AIM 256DP4-G



AIM INDUSTRIAL KITCHEN EQUIPMENT
DAP VALLEY S BUILDING NO:10 KAGITHANE / ISTANBUL





TECHNICAL DATA SHEET

GENERAL INFORMATION

Operating Temperature: -2/+8 °C
Climate class: 5
Capacity: 560L
Overall dimensions: 2500x600x850

CABINET CONSTRUCTION

Exterior Material: AISI 430 Stainless Steel
Back Material: Galvanized steel
Interior Material: AISI 430 Stainless Steel
Drain: ✓
LED lighting eclairage LED: X
Insulation: Polyurethane with high density
40kg/m³, CFCs free, zero ODP and low GWP
Insulation thickness(mm): 50
Blowing Agent: HFO

REFRIGERATION

Thermostat: Touch screen- IP65
Refrigeration system: Split system
Defrost: Resistance
Expansion Device: Capillary
Fans: ✓
Condensation: Forced air
Evaporation: With fan
Condensate pan: Hot gas condensation pan

TECHNICAL FEATURES

Gas Refrigerant: R134A
Power Supply: 230V / 1 / 50 Hz

CRATING

Crated dimensions L x l x H (mm): 2550x650x1100
Net Weight (kg): 196
Crated Weight (kg): 206



SAVING ENERGY

Eco friendly, HFC – free polyurethane insulation
providing low energy consumption



CLASSIC




AIMCLEAR

NEW CONDENSER SYSTEM

Stayclear condenser



CLASSIC



AIMEVA

EVAPARATOR DOES NOT SNOW THROUGH HOT GAS DEFROST



SPECIAL GOLDLINE AIM 256DP4-G

