

TECHNICAL DATA SHEET

600 SERIES HOT LINE



AIM AEF46


ELECTRICAL FRYERS

- With its stainless steel construction, it is long-lasting and easy to use. It is cleanable and hygienic.
- Ergonomic that provides convenience to the user in every aspect. It has a design.
- Device depth is 600 mm.
- The device is a countertop.
- Height adjustable feet on the device available.
- Front panel sheet of the device is 1mm AISI 304, Top plate sheet is 1mm AISI 304, body side panels 1 mm AISI 430, rear chimney construction covering sheet 1 mm AISI 430, chimney ventilation sheet made of 1.5 mm AISI 304 material produced.
- Oil Reservoir of the device: 15 Lt. Recommended Max. oil capacity is 12 Lt. and Min. oil capacity is 5 Lt.
- Oil temperature; With thermostat between 100°C-190°C is controlled
- The device has overheating protection as standard for safety purposes. There is a limit thermostat for protection against.
- Thanks to the locked discharge valve mechanism in the device. Safe discharge from the drain tap on the front of the device is provided. Opening and emptying without user control It cannot be done.
- The resistances in the device move upwards from the bathtub. Has the ability to. In this way, the product can be easily can be cleaned. Resistors are in the above position. Electrical energy is cut off thanks to the safety switch.
- The basket used in the device measures 215x260x95 mm.
- There are two different buttons next to the heat adjustment button on the device. There is a colored signal lamp. Green signal lamp it indicates that the device is receiving electricity. Yellow signa the lamp indicates that the resistance is active. It burns until it reaches the desired temperature. It will turn off when reached.
- The top table is formed by applying press pressure produced.



TECHNICAL DATA SHEET

ÖN / FRONT



GENERAL INFORMATION

Model: AIM AEF46

Dimension: 400x600x300


Net Weight (kg): 23

Oil Capacity (lt): 5 min; 12 max

Oil Chamber (lt): 15lt

Thermostat Working Range: 100 °C min; 190 °C max

SAG / RIGHT

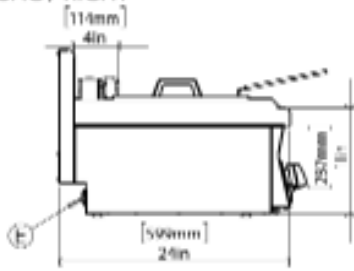

ELECTRICAL INFORMATION

Voltage: 380-415V

Electric power: 9 kW

Amper: 40,9A

Cable Section: 5x2,5 mm² TTR


Frequency: 50-60hz

Protection Class: IPX4

Min/max internal humidity: 70%/85%

Control type: Manual

ÜST / TOP



PACKAGE INFORMATION

Dimension: 500x690x575

Package Weight (kg): 29

Volume (m³): 0,20 m³

Important Note: Current value given for the device is the current drawn by the device. Is the current value. The cable distance to be connected to the device fuse ampere value to be used according to the length should be determined by a qualified electrician.

