



TECHNICAL DATA SHEET

FAST FOOD EQUIPMENT

BUN TOASTER



AIM BUN01

- With its stainless steel construction, it is long-lasting, easy to clean and hygienic.
- Device construction and sheet metal components are made of AISI 304 material.
- It has an ergonomic design that provides convenience to the user in every way.
- There are height-adjustable feet on the device.
- The conveyor part of the device can be separated from the body and allows easy cleaning.
- The heaters are controlled by thermostat in the range of 100°C / 260°C.
- The cooking wire band of the device rotates in one direction.
- Speed control is performed on the cooking wire tape of the device. The minimum product passing speed through the device can be adjusted between 5 seconds and maximum 60 seconds.
- The moving wire belt of conveyor is made of stainless steel.
- Teflon is used to facilitate the passage of the product inside the device.
- The cooking area of the device is 360 x 425 mm.
- The device has 1 2000 W resistance.

Important Note: The current value given for the device is the current drawn by the device. The fuse Ampere value, which must be used according to the length of the cable distance to be connected to the device, must be determined by a competent electrician.




FAST FOOD EQUIPMENT AIM BUN01



TECHNICAL DATA SHEET

İZOMETRİK / İSOMETRİK



GENERAL INFORMATION

Model: AIM BUN01

Dimension: 700x235x720


Net Weight (kg): 42

Cooking Area (mm): 360x425

Bread Thickness (mm): 10-50

Thermostat Range: 100°C min; 260°C max

ÖN / FRONT

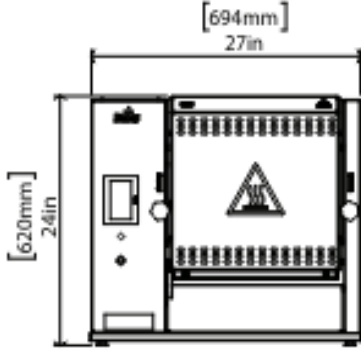

ELECTRICAL INFORMATION

Voltage: 220-240V

Electric power (kW): 2,1

Cable cross section: 3 x 2.5 mm² TTR

Pulled Amps: 10


Frequency: 50-60hz

Protection Class: IPX64

Internal humidity (>=): 55%

Cable Type: Band Speed Control W/ Limit Thermostat

ÜST / TOP

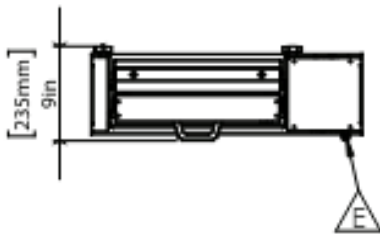

PACKAGE INFORMATION

Dimension: 710x250x730

Package Weight (kg): 47

Volume (m³): 0,45 m³

