



## TECHNICAL DATA SHEET

### DISHWASHER EQUIPMENT IW100-P GLASSWASHER



- Easy operation with digital control
- Aesthetic design
- Low cost spare parts
- Easy usage of control panel
- Low cost spare parts
- Genuine design of spray arms
- 3 washing programs



DISHWASHER EQUIPMENT IW100-P




**AIM INDUSTRIAL KITCHEN EQUIPMENT**  
DAP VALLEY S BUILDING NO:10 KAGITHANE / ISTANBUL





## TECHNICAL DATA SHEET

### DIGITAL PANNEL DETAILS

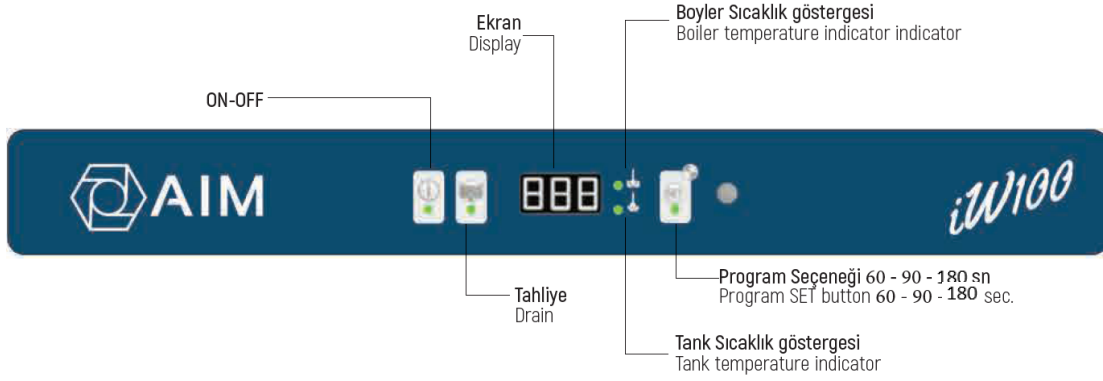

- **ON-OFF button:** It is used in order to turn on/off the machine. It lights green when machine is on operation, it lights red when machine is paused.
- **Drain button:** It is used in order to drain water from the tank. It will light green when drain is activated manually or automatically.
- **Display:** Displays tank temperature, boiler temperature, CLr, FILL, OPE, HZY, tBC and other warnings.
- **Tank temperature indicator:** The value on display belongs to the temperature of water in the tank. It lights green when it is active.
- **Boiler temperature indicator:** The value on display belongs to the temperature of water in the boiler. It lights green when it is active.
- **Program SET button:** Press the button in order to change or select the programs. 1. Program 60 sec. (Quick Wash) 2. Program 90 sec. (Regular Wash) 3. Program 180 sec. (Intensive Wash)

### OPTIONS



DISHWASHER EQUIPMENT IW100-P



## TECHNICAL DATA SHEET

### GENERAL INFORMATION

- Hygienic Washing System: ✓
- External Dimensions(mm): 690x787x1475
- Packed Product Dimensions(mm): 700x797x1485
- Product Weight (kg): 90
- Packed Product Weight (kg): 100
- Basket Dimensions(mm): 500x500
- Capacity: 1000 plates/hour
- Number of Programs: 3
- Quick Washing Program P1: 60 second
- Regular Washing Program P2: 90 second
- Intensive Washing Program P3: 180 second
- Electrical Connection: 400V / 3N / 50Hz
- Cable Section: 3x2,5mm<sup>2</sup>
- Washing Tank Capacity: 70-37 liters
- Wash Resistance Power: 3Kw
- Washing Pump Power: 0.76kW
- Washing Water Temperature: 55°C
- Boiler Tank Capacity: 8-12 Liters
- Boiler Resistance Power: 9kW
- Water Consumption: 3lt/wash
- Rinse Water Temperature: 82°C
- Total Power: 9,70kW
- Sound Level: <63dB
- Water inlet Diameter: ¾" Inch
- What is supplied with the product: 1 Glass Basket, 1 Sprinkler Spoon Holder

